


H504 GLOW

GLOWING SMOKE GENERATOR



The **H504 GLOW** for natural wood chips and wood flour is suitable for Hot-Smoking Installations with a capacity of up to 18 trolleys as well as Climatic Maturing Installations with up to 80 trolleys.

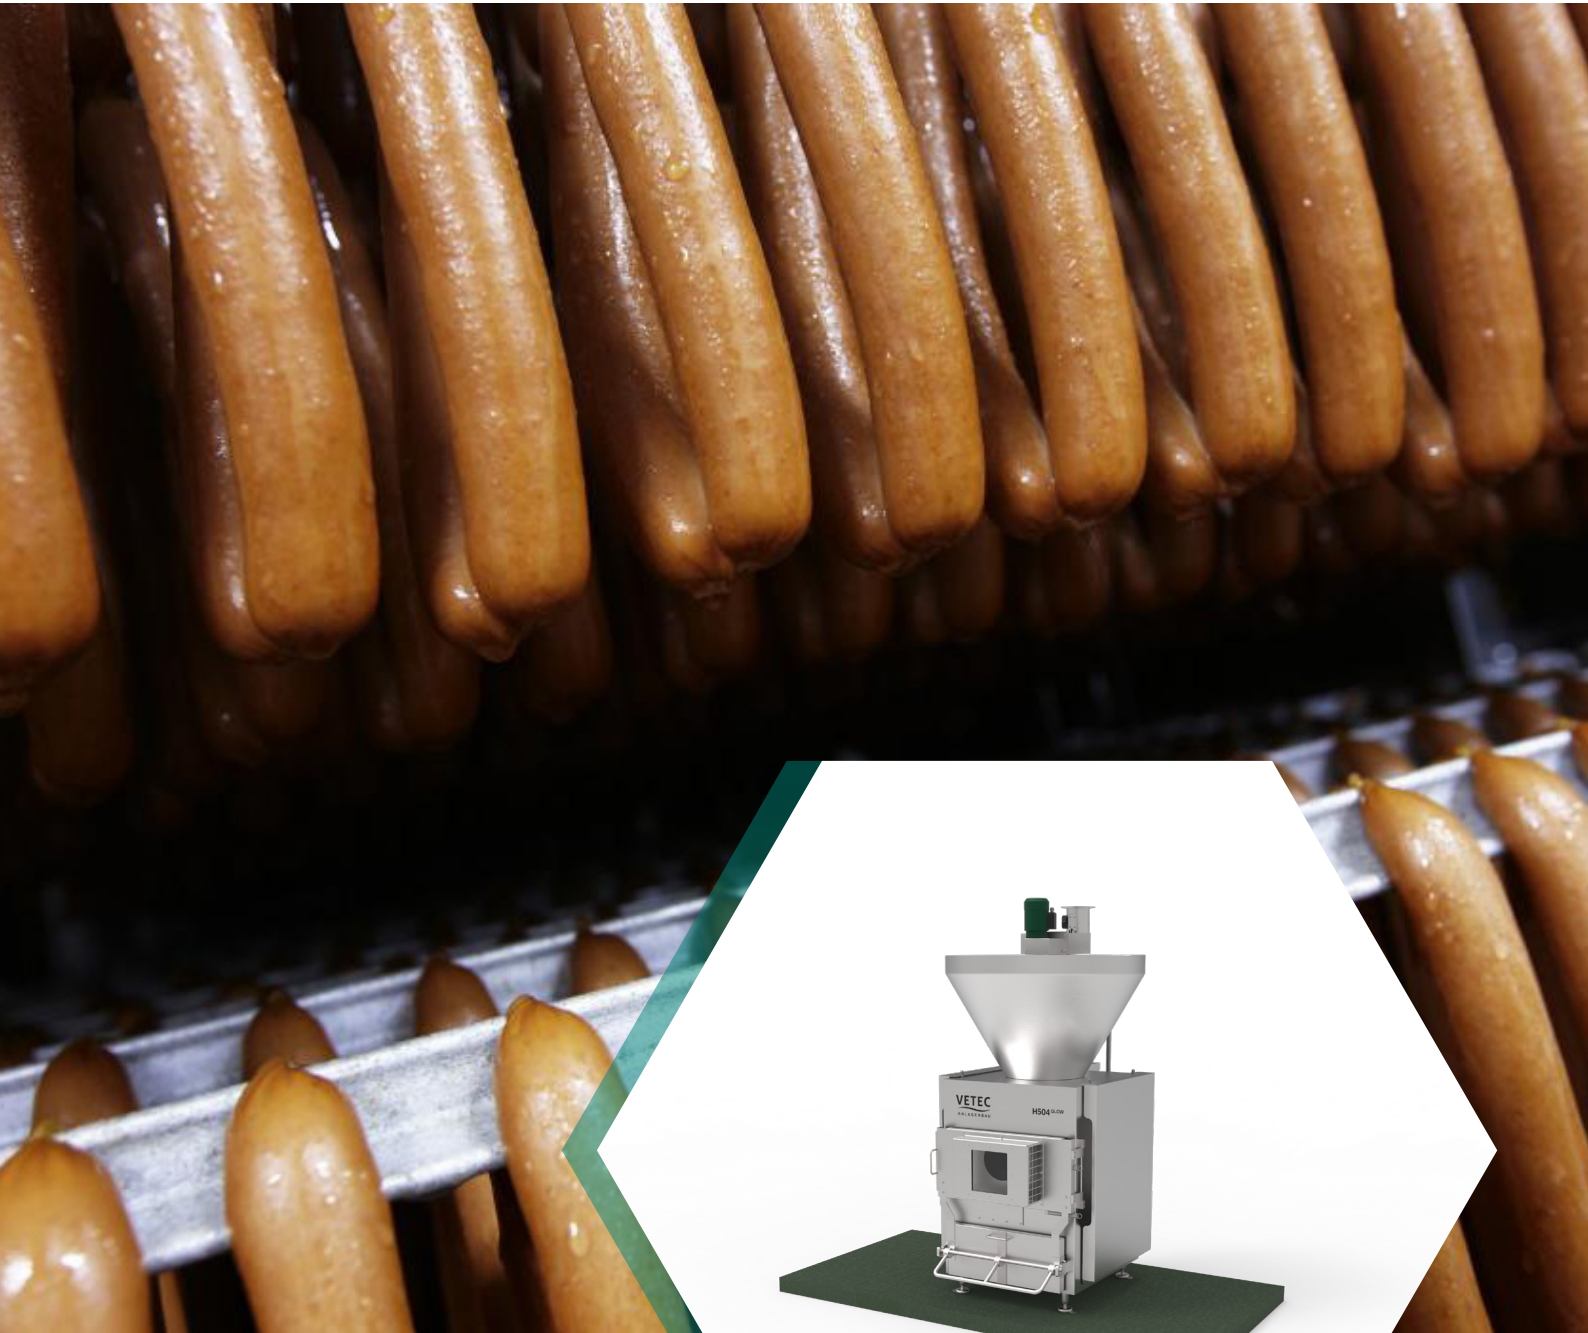

TECHNICAL DETAILS

1. MAXIMUM USER FRIENDLINESS & SIMPLE OPERATION

- The Smoke Generator is equipped with a user-friendly compact control.

2. ABSOLUTE CONSISTENCY IN PROCESSES & PRODUCTS

- We achieve short process times by using a high level of smoke intensity which is provided at a constant rate.

3. CAPTIVATING QUALITY

- Temperature monitoring with an integrated extinguishing device and water pressure check, together with optional smoke/volume flow monitoring allow us to guarantee maximum operational reliability.

4. OUTSTANDING HYGIENE

- The sophisticated hygienic design of the smoke generator ensures easy access for cleaning & maintenance.

For particularly large productions with several smoke generators, we recommend the AUTOMATIC ASH REMOVAL system



DIMENSIONS

WIDTH	HEIGHT	DEPTH	HOPPER DIAMETER
1000 mm	2010 mm	1400 mm	1000 mm

ENERGY VALUES

ELECTRICAL RATING	WATER RATING	WASTE WATER CONNECTION	SMOKE TUBE CONNECTION
2 kW 400, 230, 440, 575 V 50/60 Hz 3Ph	3-4 bar	DN32	DN125

MISC.

WATER CONSUMPTION	QUANTITY OF SMOKE	REQUIREMENT OF FRESH AIR	HOPPER VOLUME	WEIGHT
0,3 m ³ /h	250 m ³ /h	250 m ³ /h	280 l	480 kg